

OUTDOOR LIGHTING



ADVANTE / FORWARD

ADVANTE S / M



Housing:	Pressure die-cast aluminum alloy with polyester powder paint.
Housing color:	Black, RAL
Beam angle:	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°
IES protection classes:	Class I (SELV)
Color temperature, K:	3000K - 6000K
Input voltage, V:	220V
Control system:	Switch On\Off, 1-10V, DALI, DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	2,16-4,75kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
614215100	ADVANTE S 50W 220V IP66 SINGLE COLOR	50W	252,6x337x55,2	220V	30°, 60°, 90°, 45°(Asy)	3000K-6000K	2.16kg
614215105	ADVANTE S 75W 220V IP66 SINGLE COLOR	75W	252,6x337x55,2	220V	30°, 60°, 90°, 45°(Asy)	3000K-6000K	2.16kg
614215110	ADVANTE S 100W 220V IP66 SINGLE COLOR	100W	252,6x337x55,2	220V	30°, 60°, 90°, 45°(Asy)	3000K-6000K	2.16kg
614215115	ADVANTE M 150W 220V IP66 SINGLE COLOR	150W	320,3x462,6x84,6	220V	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°	3000K-6000K	4.75kg
614215120	ADVANTE M 180W 220V IP66 SINGLE COLOR	180W	320,3x462,6x84,6	220V	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°	3000K-6000K	4.75kg

ADVANTE L

Housing:	Pressure die-cast aluminum alloy with polyester powder paint.
Housing color:	Black, RAL
Beam angle:	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°
IES protection classes:	Class I (SELV)
Color temperature, K:	3000K - 6000K
Input voltage, V:	220V
Control system:	Switch On\Off, 1-10V, DALI, DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	6,33kg



Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
614215125	ADVANTE L 240W 220V IP66 SINGLE COLOR	240W	385,4x487,6x93,4	220V	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°	3000K-6000K	6.33kg
614215130	ADVANTE L 280W 220V IP66 SINGLE COLOR	280W	385,4x487,6x93,4	220V	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°	3000K-6000K	6.33kg



FORWARD S / M

Housing:	Pressure die-cast aluminum alloy with polyester powder paint.
Housing color:	Black, RAL
Beam angle:	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°
Control system:	Switch On\Off, 1-10V, DALI, DMX-512
IES protection classes:	Class I (SELV)
Color temperature, K:	3000K - 5700K
Input voltage, V:	220V
Power factor, PF:	0,90
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +55°C
Weight:	19-34,5kg


Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
614215050	FORWARD S 320W 220V IP66 SINGLE COLOR	320W	535x581x109	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	19kg
614215055	FORWARD S 480W 220V IP66 SINGLE COLOR	480W	535x581x109	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	19kg
614215060	FORWARD S 550W 220V IP66 SINGLE COLOR	550W	535x581x109	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	19kg
614215065	FORWARD S-MAX 600W 220V IP66 SINGLE COLOR	600W	538x728x114	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	21.8kg
614215070	FORWARD M 800W 220V IP66 SINGLE COLOR	800W	656x580x138	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	34.6kg
614215075	FORWARD M 960W 220V IP66 SINGLE COLOR	960W	656x580x138	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	34.6kg
614215080	FORWARD M 1100W 220V IP66 SINGLE COLOR	1100W	656x580x138	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	34.6kg
614215085	FORWARD M-MAX 1200W 220V IP66 SINGLE COLOR	1200W	765x803x138	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	34.5kg

FORWARD L

Housing:	Pressure die-cast aluminum alloy with polyester powder paint.
Housing color:	Black, RAL
Beam angle:	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°
Control system:	Switch On\Off, 1-10V, DALI, DMX-512
IES protection classes:	Class I (SELV)
Color temperature, K:	3000K - 5700K
Input voltage, V:	220V
Power factor, PF:	0,90
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +55°C
Weight:	43,8-51kg



Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
614215090	FORWARD L 1440W 220V IP66 SINGLE COLOR	1440W	673x791x138	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	43.8kg
614215095	FORWARD L 1650W 220V IP66 SINGLE COLOR	1650W	673x791x138	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	43.8kg
614215100	FORWARD L-MAX 1800W 220V IP66 SINGLE COLOR	1800W	977x817x138	220V	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°	3000K-5700K	51kg

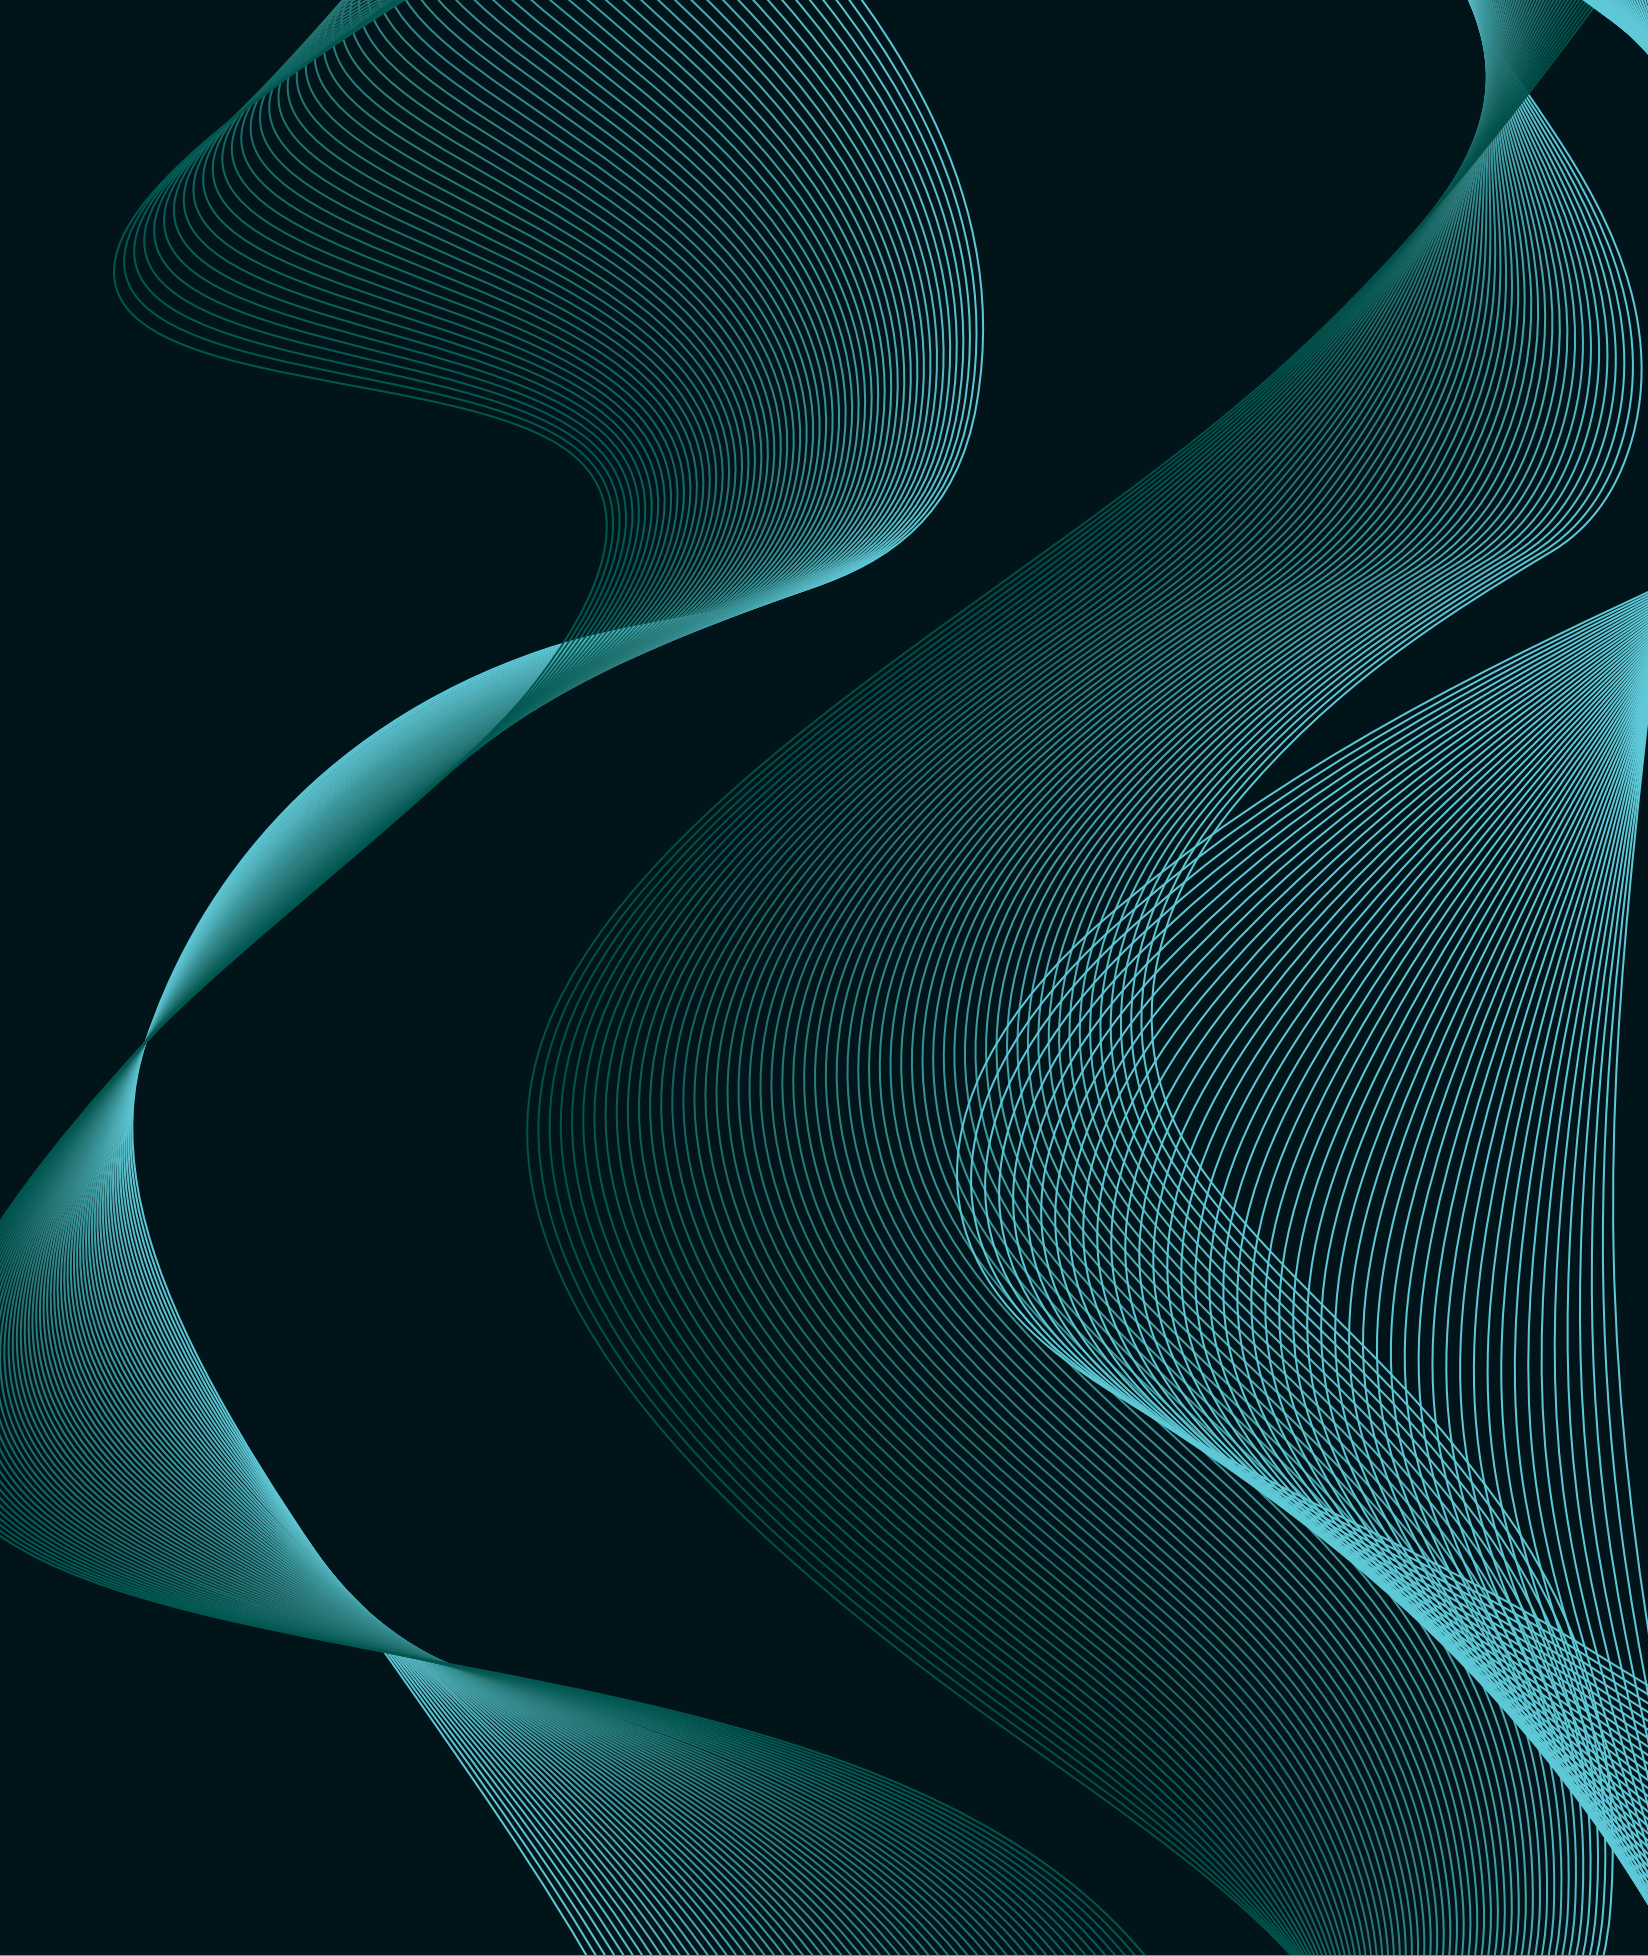

The latest information about new products, solutions,
and the current version of the catalog can be found
on our website <https://img-lighting.com/>